

TRAP PRIMER




2400

AUTOMATIC TRAP SEAL PRIMER VALVE WITH ALL BRONZE BODY, 1/2" IPS THREADED CONNECTIONS OR 1/2" COPPER SWEAT UNION CONNECTIONS

UPC (IAPMO) LISTED

TESTED AND APPROVED IN CONFORMANCE WITH ASSE 1018
THE AMERICAN SOCIETY OF SANITARY ENGINEERS

CONFORMS TO ASME A112.1.2

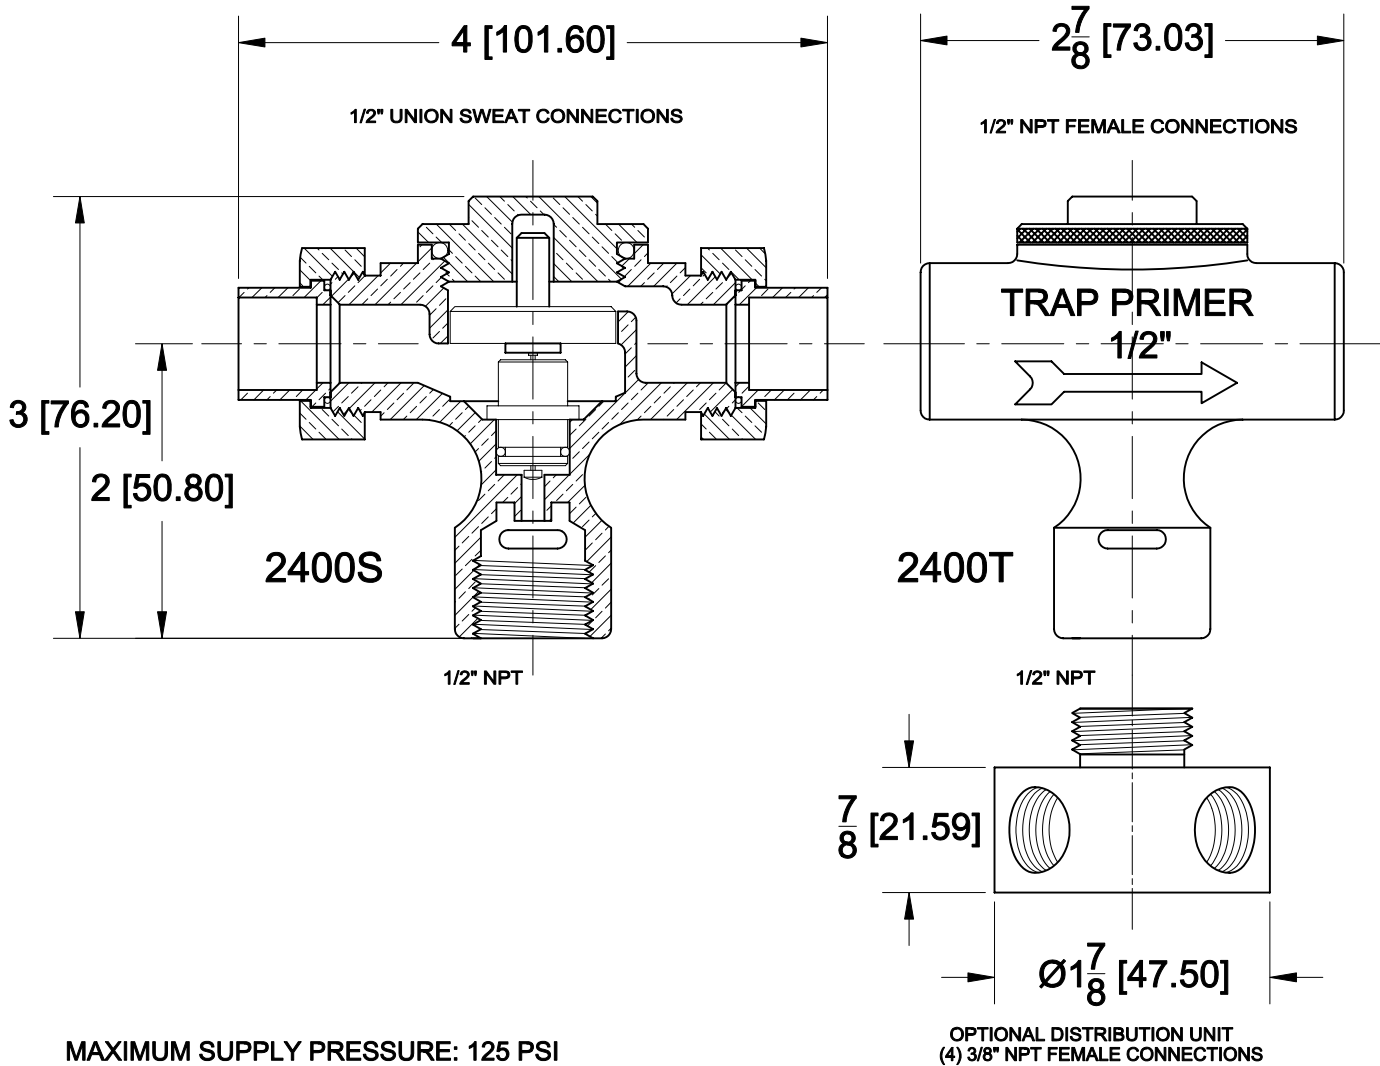

MAXIMUM SUPPLY PRESSURE: 125 PSI
MINIMUM SUPPLY PRESSURE MUST EXCEED 25 PSI

FOR PROPER OPERATION, MINIMUM FLOWS MUST EXCEED THOSE STATED IN FLOW CHART

FLOW CHART

Cat. No.	Pipe Size
□ 2400-T	1/2" FEMALE THREAD
□ 2400-S	1/2" COPPER SWEAT UNION
□ 2400-MF	1/2" IPS DISTRIBUTION UNIT

INLET PRESSURE	25	50	75	100	125
GPM *	1.1	1.6	2.0	2.3	2.4
LPM *	4.2	6.1	7.6	8.7	9.1

* Minimum cold flow required for proper trap priming

AutoCad.dwg