

# CLOSET CARRIERS




## 340-A-XB SERIES (1,000 LB)

NO-HUB ADJUSTABLE VERTICAL WATER CLOSET CARRIER WITH 4" NO-HUB CONNECTIONS, 2" NO-HUB VENT CONNECTION, UNIVERSAL FLOOR MOUNT FOOT SUPPORTS, REAR ANCHOR SUPPORT (SINGLE CARRIERS), ABS PLASTIC CLOSET COUPLING W/ O-RING SEAL & INTERNAL WRENCH GROOVES, 5/8" HEAVY DUTY SUPPORT HARDWARE, NEOPRENE BOWL GASKET, INTEGRAL TEST CAP, ADJUSTABLE GASKETED FACE PLATE W/ REMOVABLE LUGS AND PLASTIC STUD PROTECTORS.

THIS SYSTEM COMPLIES & EXCEEDS ALL REQUIREMENTS OF ASME A112.6.1M (UP TO 1,000 LBS)  
 ROD SUPPORT FEET SHOULD BE INSTALLED AS CLOSE TO FINISH WALL AS POSSIBLE  
 ROD SUPPORT FEET MUST CONTACT AND REST FIRMLY ON STRUCTURAL SLAB

NOTE: SPECIAL HIGH STRENGTH THREADED STUDS ARE PROVIDED TO ACHIEVE LOAD RATING - USE ONLY PROVIDED HARDWARE

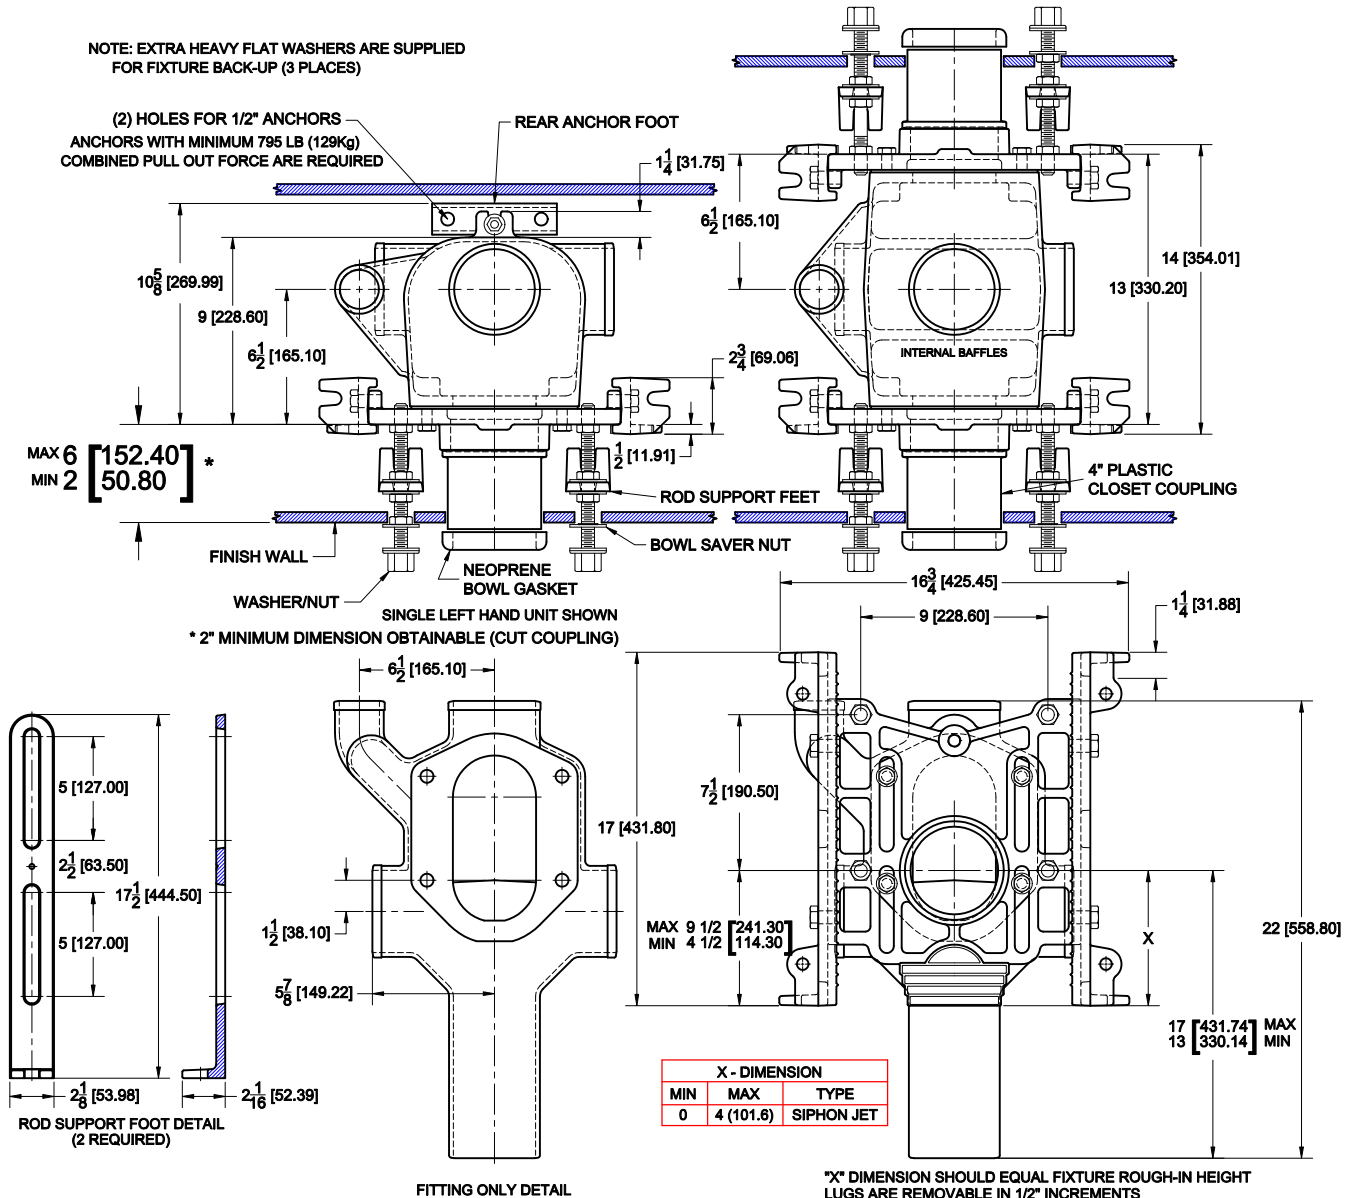

### OPTIONS

| Suffix | Description               |
|--------|---------------------------|
| AM1    | FLUSH VALVE SUPPORT       |
| AM21   | TILING FRAME (SIPHON JET) |

| CAT.NO.     | WT.LB. |
|-------------|--------|
| 340-A-NL-XB | 95.0   |
| 340-A-NR-XB | 95.0   |
| 340-A-ND-XB | 115.0  |

AutoCad.dwg