

# FLOOR DRAIN



Approval Date

Customer Approval

Job Location


Job Name

1640  
CAST IRON FLOOR / AREA DRAIN WITH DUCTILE IRON TRACTOR STYLE GRATE AND BOTTOM OUTLET.  
INSTALLATION INSTRUCTIONS  
Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data  
Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data  
are Subject to Manufacturers Tolerance and Change Without Notice.

1640

CAST IRON FLOOR / AREA DRAIN WITH DUCTILE IRON TRACTOR STYLE GRATE AND BOTTOM OUTLET.

## INSTALLATION INSTRUCTIONS

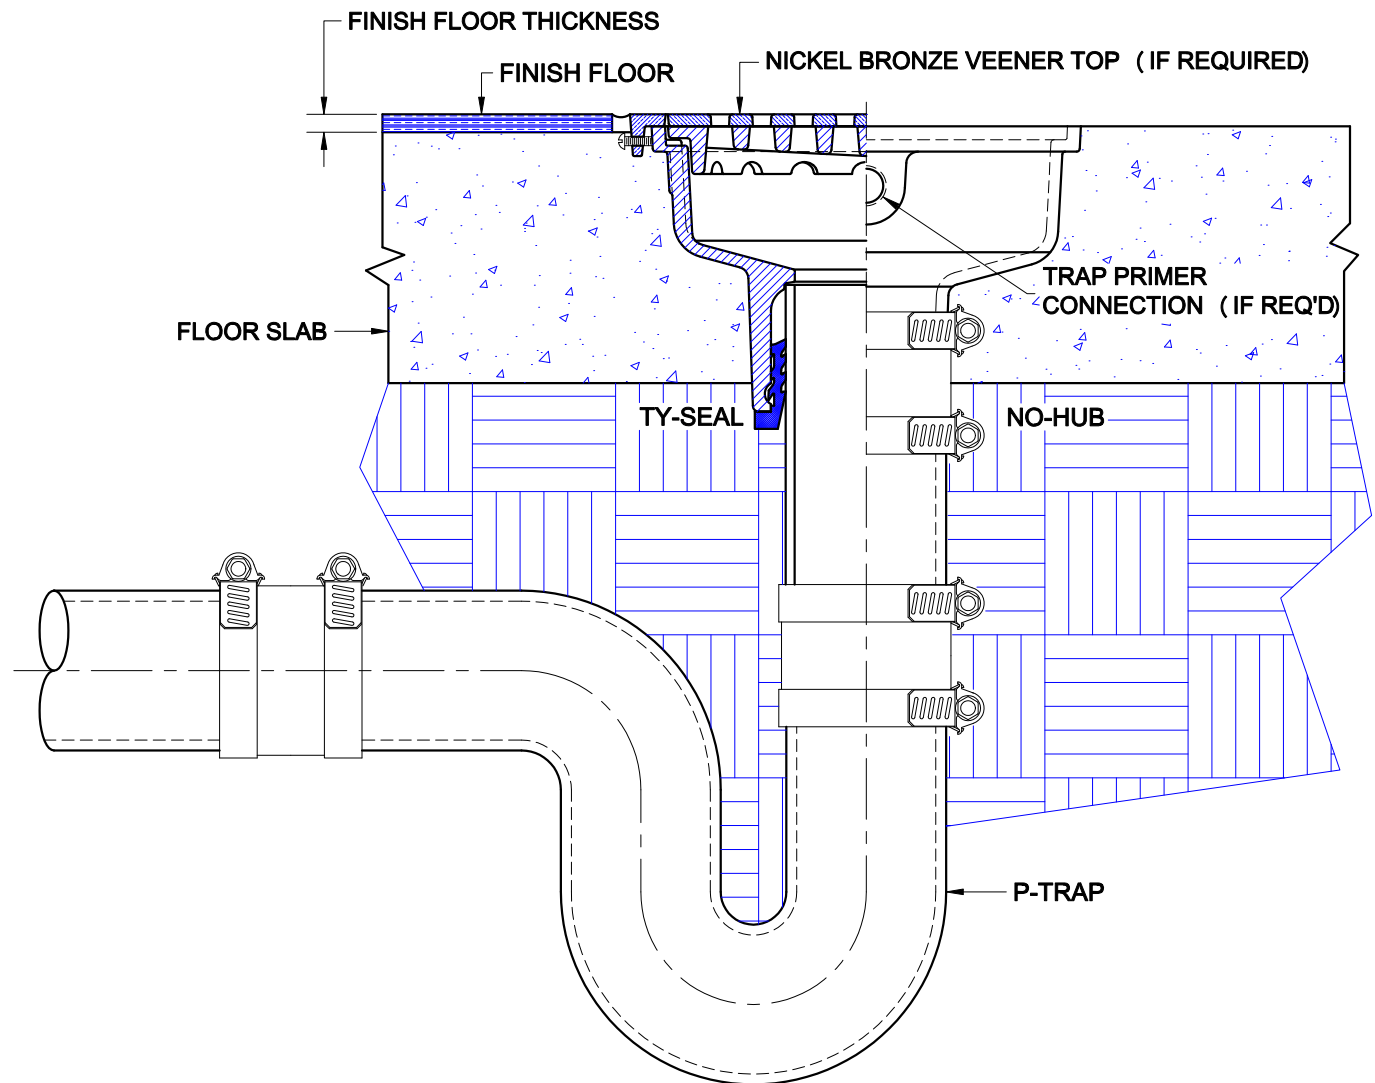

The Wade 1640 floor drain is for slab on grade construction. The drain piping is first run to an elevation below the expected finish floor level. The piping must include a p-trap and the drain body is secured to the pipe with with any of three connections; No-Hub, Inside Caulk, or Push-On Ty-Seal. The type of connection must be specified upon ordering any Wade Drain. If the Ty-Seal connection is specified, apply Tyler Ty-Seal lubricant to the inside surfaces of the gasket and then firmly push the drain body onto the pipe until it contacts the pipe stop in the body. No-Hub outlets should be installed with Tyler or Anaco/Husky couplings and secured with a torque wrench to the manufacturers recommendations. Inside Caulk connections should follow standard industry practices. Once the body is connected to the pipe, the concrete slab is poured to an elevation level with the top of drain body. For finish floor installation such as tile, the top of the drain should extend above the structural slab the dimension of the thickness of the floor material. Care must be taken to protect the top during installation. Use either cardboard, tape or other protective materials.