

PLANTING AREA DRAIN



Approval Date

Customer Approval


Job Location

Job Name

Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data

2000-PA

CAST IRON PLANTING AREA DRAIN WITH FLANGE, FLASHING CLAMP RING, PERFORATED STEEL STANDPIPE ASSEMBLY, SECURED CAST IRON DOME AND BOTTOM OUTLET. INSTALLATION INSTRUCTIONS

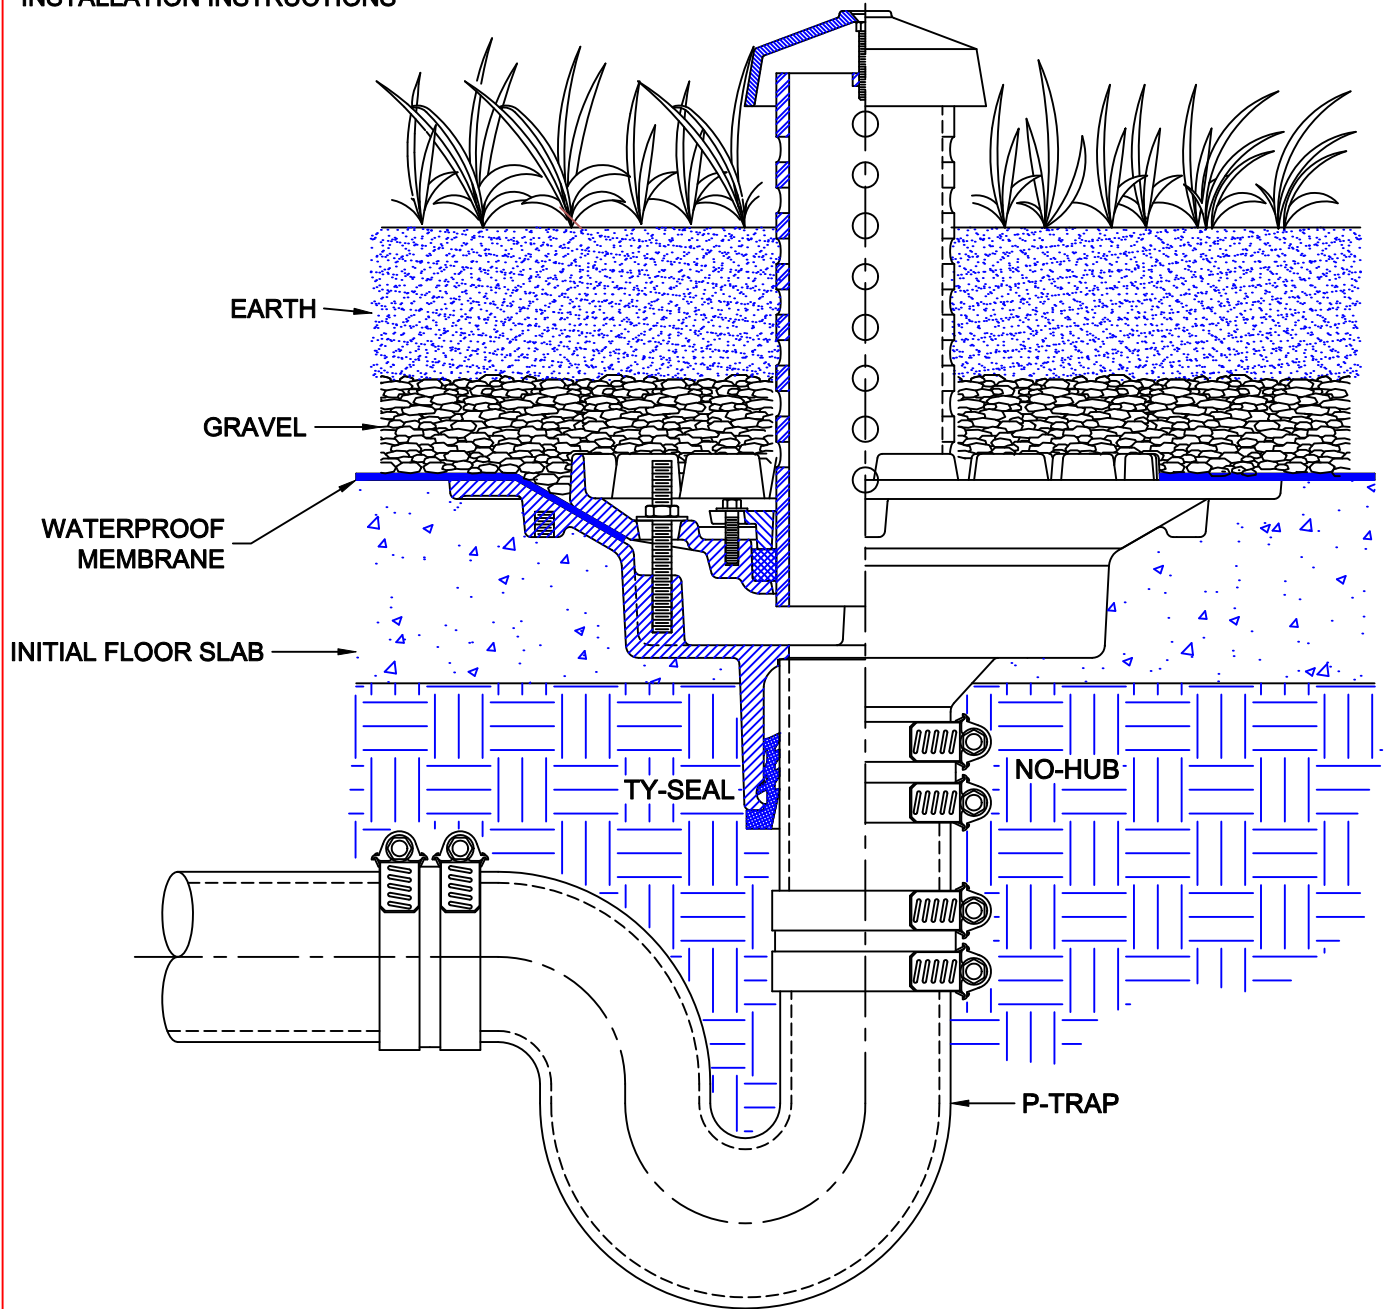

The Wade 2000-PA is used as a planting area drain in inside decorative green arenas or similar areas. The dome prevents debris from entering the drain line. The drain piping is first run to an elevation below the expected finish floor level. The piping must include a p-trap and the drain body is secured to the pipe with any of four connections; Threaded, No-Hub, Inside Caulk, or Push-On Ty-Seal. The type of connection must be specified upon ordering any Wade Drain. If the Ty-Seal connection is specified, apply Tyler Ty-Seal lubricant to the inside surfaces of the gasket and then firmly push the drain body onto the pipe until it contacts the pipe stop in the body. No-Hub outlets should be installed with Tyler or Anaco/Husky couplings and secured with a torque wrench to the manufacturers recommendations. Threaded or Inside Caulk connections should follow standard industry practices. Once the body is connected to the pipe, the initial concrete sub-floor is poured to an elevation level with the top flange of the drain body. The waterproofing membrane is applied to the the sub-floor surface and over the drain body. The clamping collar is then placed onto the drain and secured - the membrane must be clamped between the body and the clamping collar.

AutoCad.dwg