

FLOOR ACCESS COVER



Approval Date

Customer Approval

Job Location



Job Name

Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data
Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data
are Subject to Manufacturers Tolerance and Change Without Notice.

8300-SH

SATIN FINISH FLOOR ACCESS COVER AND FRAME WITH SCORIATED VANDAL PROOF HINGED COVER.

INSTALLATION INSTRUCTIONS

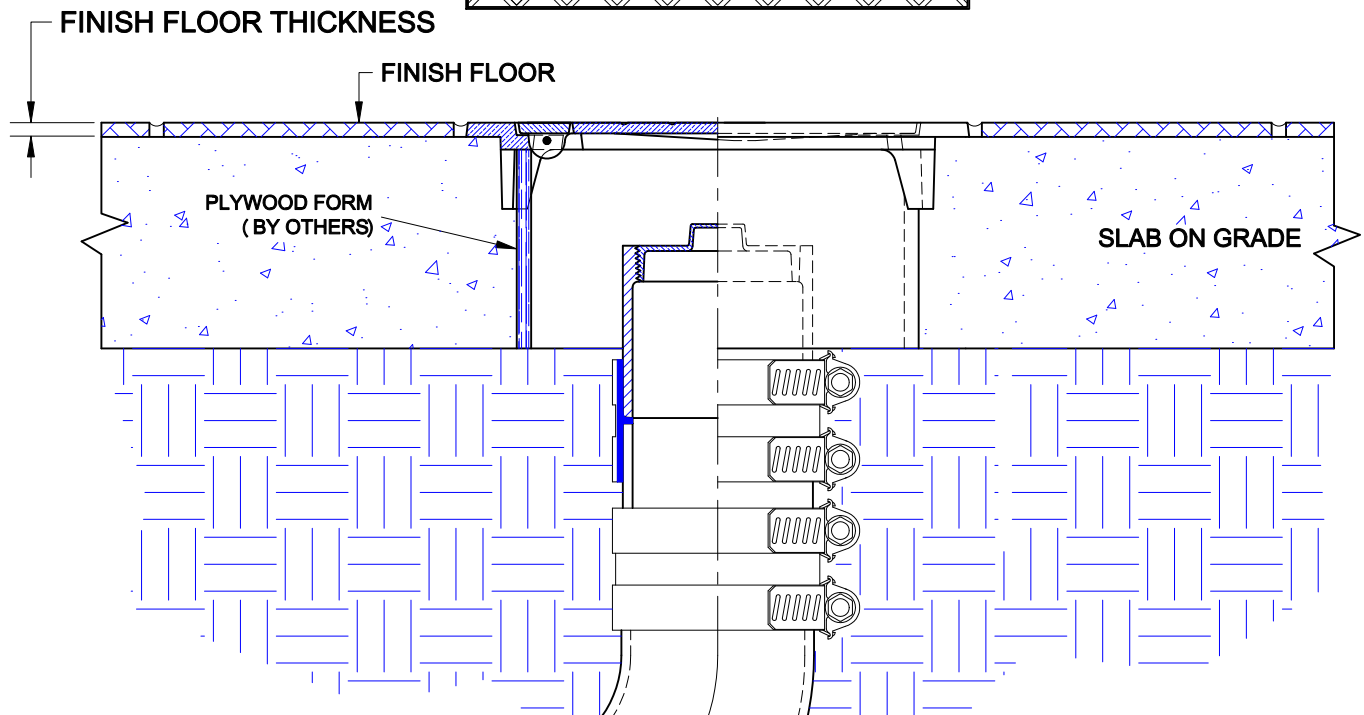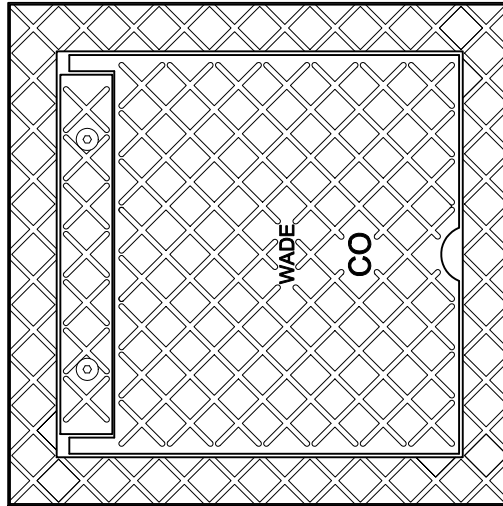

The Wade 8300-SH floor access cover is for slab on grade floor construction and provides access to plumbing cleanouts or other components. The drain piping is first run to an elevation below the expected finish floor level. The cleanout or other component is terminated below the finish floor level. The contractor provides a plywood form to house the cleanout and the 8300-SH access cover/frame provides the floor level access.

The access cover should be level with the top surface of the finished floor. Pour concrete up to and around the perimeter of the top. If a finish floor material is to be used, the top should extend above the structural slab the dimension of the finished floor thickness.

Care must be taken to protect the top during installation. Use either cardboard, tape or other protective materials.

AutoCad.dwg