

# FLOOR ACCESS HOUSING




Approval Date  
Customer Approval  
Job Location  
Job Name

8400

CAST IRON FLOOR ACCESS HOUSING WITH SATIN FINISH NICKEL BRONZE TOP ASSEMBLY, VANDAL PROOF SECURED SCORIATED COVER AND THUMB SCREWS.  
INSTALLATION INSTRUCTIONS

Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data

are Subject to Manufacturers Tolerance and Change Without Notice.

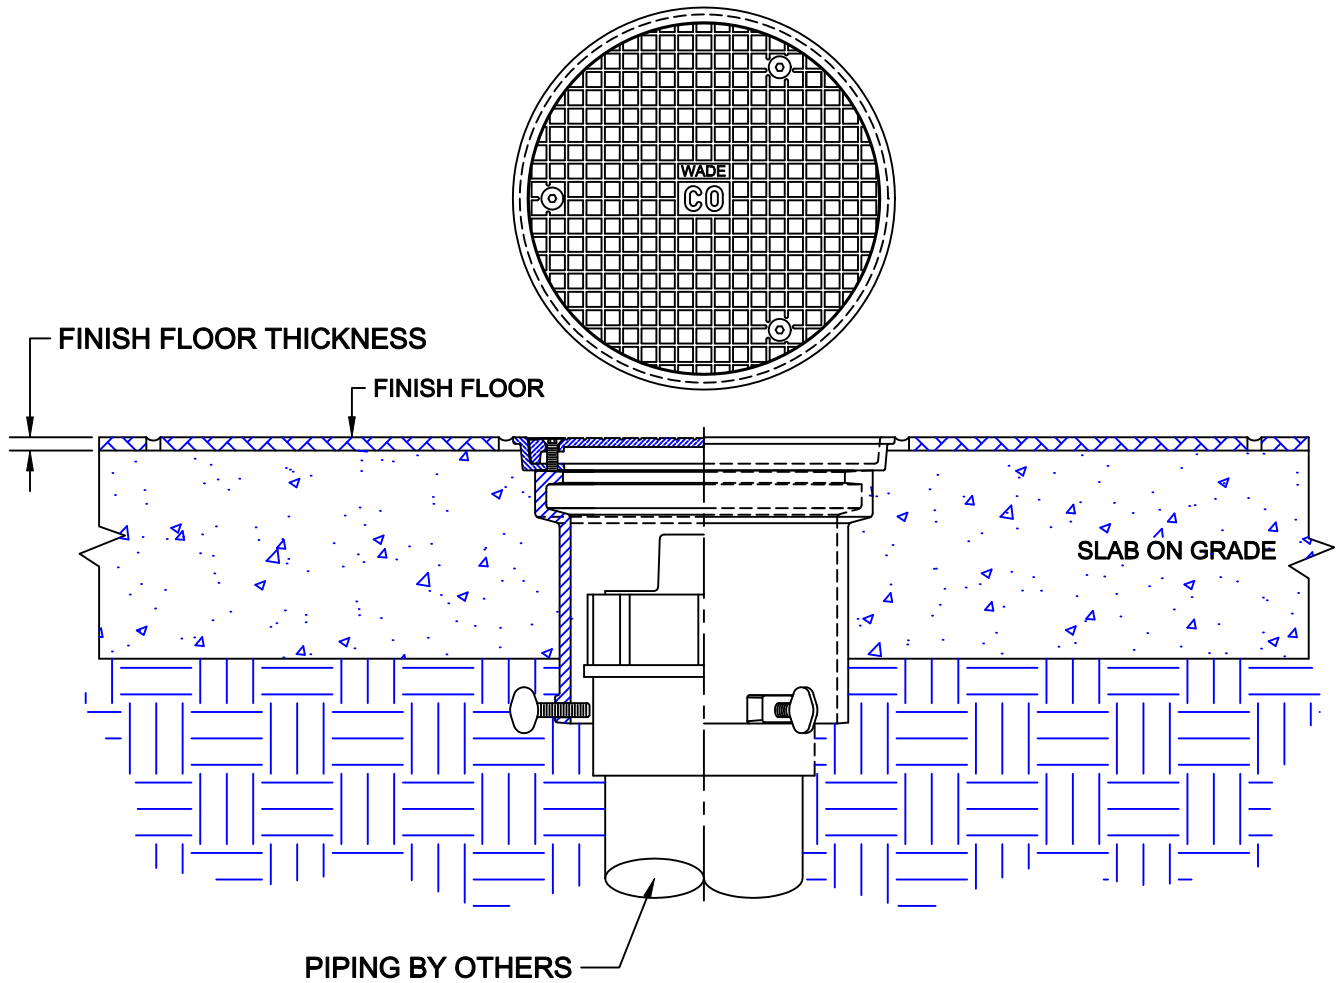

The Wade 8400 floor access housing is for slab on grade construction. The drain piping is first run to an elevation below the expected finish floor level. The cleanout is terminated below the finish floor level. The top assembly is pre-installed onto the cast iron housing. Loosen the thumb screws and place the housing over the cleanout. Using a string line or laser level, position the top of the housing level with the anticipated finish floor level and tighten the thumb screws.

If a finish floor material is to be used, the top should extend above the structural slab the dimension of the finished floor thickness. Pour concrete up to and around the perimeter of the top.

Care must be taken to protect the top during installation. A plastic cover is provided and should remain in place until after the installation of the finish floor is complete. If the plastic protector is lost, use either cardboard, tape or other protective materials.