

CLEANOUT TEE W/ PLUG



Approval Date

Customer Approval


Job Location

Job Name

Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data

8560- (B or E)

CAST IRON CLEANOUT TEE WITH NO-HUB INLET/OUTLET AND NPT THREADED BRASS RAISED HEAD OR COUNTERSUNK PLUG (PLUG DRILLED & TAPPED 1/4-20NC SCREW) .
 INSTALLATION INSTRUCTIONS

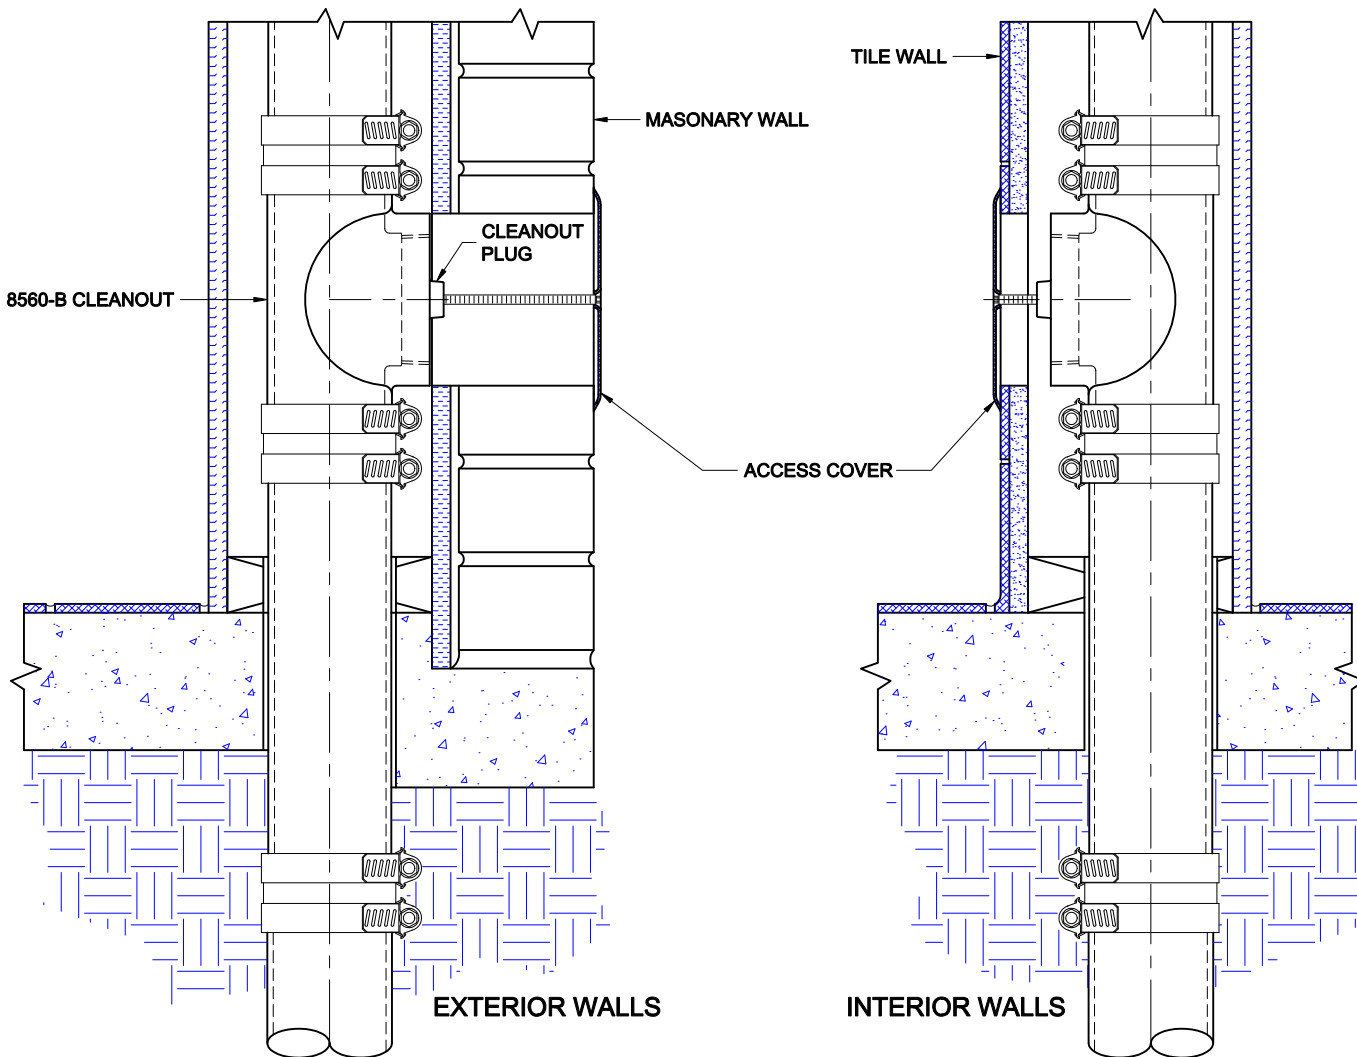

The Wade 8560- (B or E) cleanout tee is used in concealed drainage lines where a cleanout is required. Type 'B' plugs are raised head brass and type 'E' are countersunk type. An access cover is required to allow maintenance at the surface of the finished wall. No-Hub connections should be installed with Tyler or Anaco/Husky couplings and secured with a torque wrench to the manufacturers recommendations. Threaded brass plugs are loosely assembled into the tee and must be removed to apply thread sealant. Use a high quality teflon based product applied to the threads of the plug. Re-install the plug and tighten the plug using sufficient force for a watertight seal.