


SOLIDS INTERCEPTOR



5760

A.R.E. COATED STEEL SOLIDS INTERCEPTOR WITH SECURED LATCHING GASKETED COVER, NO-HUB INLET/OUTLET AND REMOVABLE PERFORATED SEDIMENT BASKET WITH LIFT HANDLE.

BUCKET PERFORATION SIZE: 3/16" DIAMETER ON 1/4" CENTERS (STAGGERED CENTERS) 51% OPEN AREA

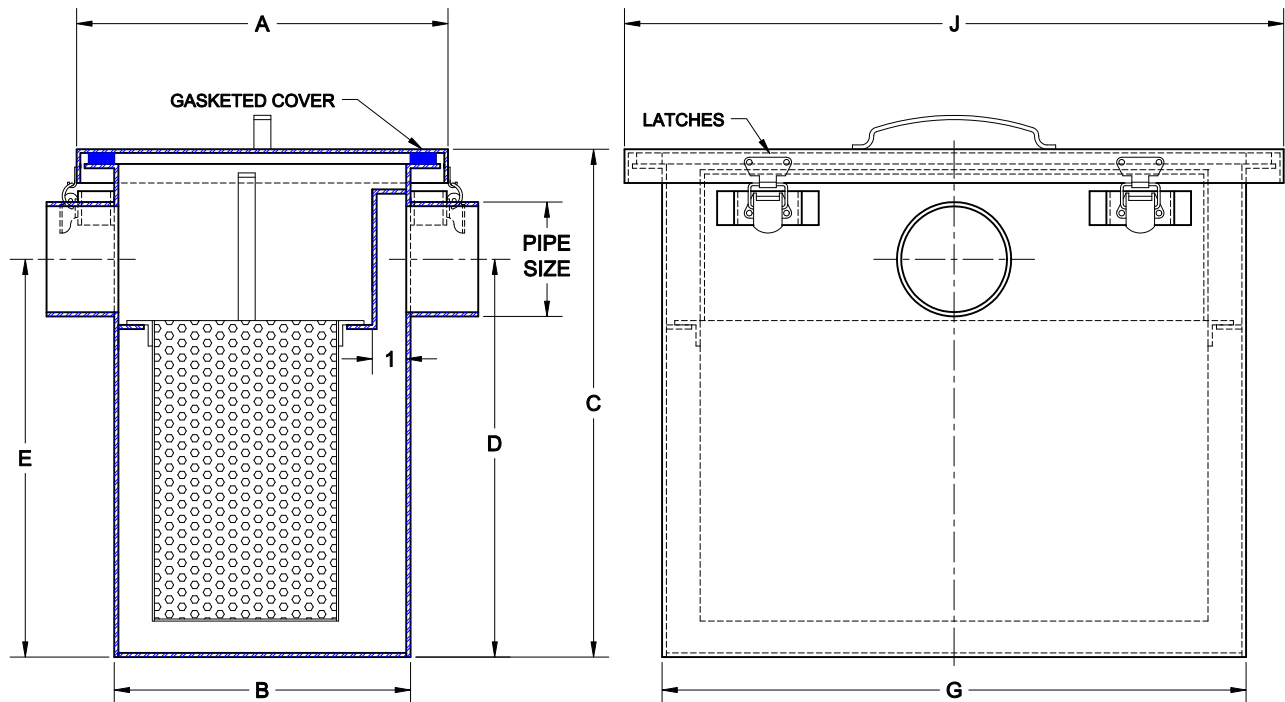

✓	CATALOG NUMBER	PIPE SIZE	FLOW RATE (GPM)	A	B	C	D/E	G	J
	5760-04	2	4	11	8 3/4	10 1/2	7	10 1/4	12 1/2
	5760-07	2	7	11	8 3/4	13	9 1/2	10 1/4	12 1/2
	5760-10	2	10	11	8 3/4	13	9 1/2	12 1/4	14 1/2
	5760-15	2	15	11	8 3/4	13	9 1/2	14 1/4	16 1/2
	5760-20	3	20	11	8 3/4	13	9 1/2	16	18 1/4
	5760-25	3	25	11	8 3/4	18	13 1/2	17 1/4	19 1/2
	5760-35	4	35	11	8 3/4	22	17 1/2	17 1/4	19 1/2
	5760-50	4	50	11	8 3/4	22	17 1/2	21 1/4	23 1/2
	5760-75	4	75	11	8 3/4	30	17 3/4	27 1/4	29 1/2
	5760-100	4	100	20 1/4	18	30	17 3/4	27 1/4	29 1/2
	5760-150	4	150	20 1/4	18	40	22 1/2	33 1/4	35 1/2
	5760-200	6 *	200	22 1/4	20	50	29	33 1/4	35 1/5

UNIT SIZES 100 & LARGER INCORPORATE TWO LIFT HANDLES ON COVER & BASKET
 * 6" PIPE SIZE IS 150 LB FLANGED INLET/OUTLET

OPTIONS

Suffix	Description
<input type="checkbox"/> 304	ALL TYPE 304 FABRICATED S/S
<input type="checkbox"/> 316	ALL TYPE 316 FABRICATED S/S

OPTIONS

Suffix	Description
<input type="checkbox"/> 201	DISPOSABLE FILTER BAGS
<input type="checkbox"/> P063	BUCKET WITH 1/16" DIA. PERFORATIONS
<input type="checkbox"/> P094	BUCKET WITH 3/32" DIA. PERFORATIONS
<input type="checkbox"/> P156	BUCKET WITH 5/32" DIA. PERFORATIONS
<input type="checkbox"/> P125	BUCKET WITH 1/8" DIA. PERFORATIONS

AutoCad.dwg

Approval Date

Customer Approval

Job Location

Job Name

Wade Division / Tyler Pipe Assumes No Responsibility For Superseded or Voided Data
 Dimensional Data (Inches/mm) are Subject to Manufacturers Tolerance and Change Without Notice.